

Timbakote® Timber Prep

Timber Prep is a preparatory coat for all exterior timber cladding, joinery and the proprietary cladding system Shadowclad™ Natural Plywood. Applied as an initial coat to these surfaces it:

- Penetrates fibres and seals and protects against moisture ingress and UV degradation
- Binds fibres together to provide a stable surface that promotes excellent long-term adhesion and life of the top coats
- Provides a barrier against timber treatment leachates
- Absorbs into the substrate to highlight the natural variation in the timber grain.

Timbakote® Rustic Base Coat

Rustic Base Coat is an opaque, acrylic coating that is over coated with Timbakote® Timber Pro. This coating system has the durability of an acrylic paint system with the appearance of a high quality stain finish and out performs any other stain system available. It is suitable for applying to exterior, textured surfaces such as:

- Band sawn timber cladding
- Band sawn ply such as Shadowclad™
- Textured fibre cement boards.

Timbakote® Timber Pro

Timber Pro is an exterior film forming stain that is widely acknowledged as the very best available. It cures to a flexible, protective film that:

- Prevents unsightly mould and algae growth
- Protects cladding by filtering out UV rays
- Enhances the natural beauty of timber.

Timbakote® Deck Pro

Deck Pro is water repellent stain for decks, timber furniture and any exterior timber where water repellency is a benefit. Rain water beads and runs off ensuring substrates are drier which:

- Makes coated areas useable more quickly
- Reduces mould and fungi growth
- Reduces the risk of accidental falls
- Extends the life expectancy of decks and furniture.

Timbakote® Dura Shield

Dura Shield is an interior penetrating lacquer for timber doors, ceilings, walls and trim work. It may be applied clear or tinted to any colour in the Timbakote® range as a protective coating that:

- Dries to a tough, abrasion resistant finish
- Has excellent adhesion to all timbers
- Develops the natural beauty of timber by enhancing the timber grain.

Timbakote® Lockwood™ Blond

Lockwood™ Blond has been specially developed for internal timber surfaces where a blonded or whitened timber appearance is desired. It has excellent adhesion to all timber and dries to a tough, abrasion resistant finish and can be applied to:

- Aged and new timber interiors
- Interior timber doors, ceilings, walls and trim
- Refurbishing and modernising Lockwood™ interiors.



SMOKEY ASH



EUCALYPTUS




EBONY



LIGHT CEDAR



BIRCH GREY

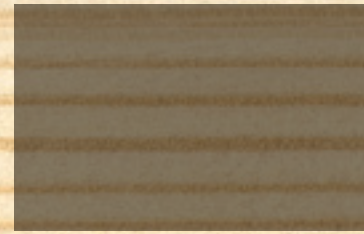


IRON BARK



LIGHT OAK




NUTMEG

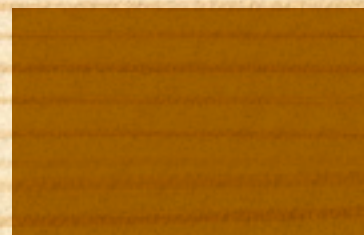


CAPERS



SAPLING

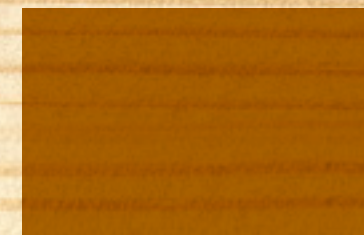

TEAK

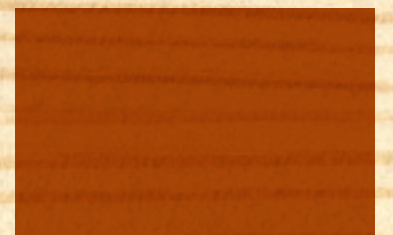


CEDAR



KELP



KARAKA

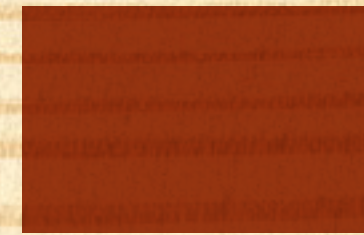

REDWOOD




MAHOGANY




BLACKBEAN



MANUKA HONEY

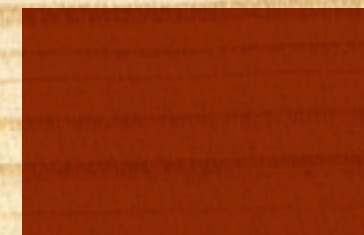

CHESTNUT

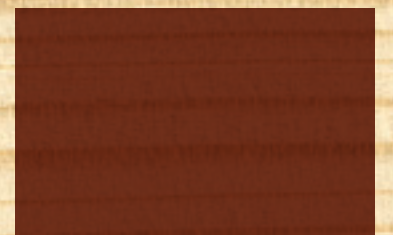

DARK OAK




DUSK



LIGHT GREY



SLATE

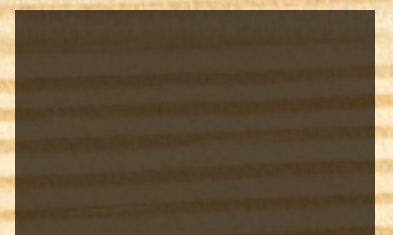

CHARCOAL

Note: Colours are displayed as close as the modern printing process will allow. However finished colour will be determined by the coating system used, the surface profile, timber species and substrate condition. Confirm your colour selection prior to commencing any project by using testpots of Timbakote products available for this purpose.